


**Product Features**

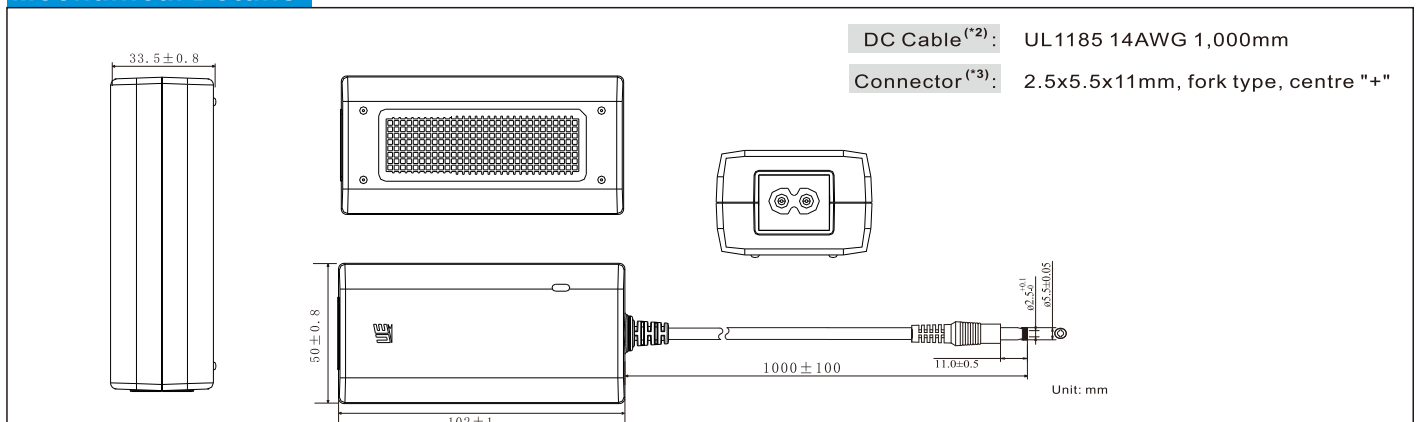
- Meets medical & I.T.E. safety
- 2 MOPP input to output isolation
- Touch current  $\leq 100\mu\text{A}$
- Energy efficiency level VI
- $\leq 0.075\text{W}$  standby power
- 9.0V-36V outputs, up to 36W
- 5,000m operating altitude
- AC inlet C8



★★★★★

**Models & Parameters**

Model Number	Voltage <sup>(1)</sup> (V)	Current (A)	Rated Power	Ripple & Noise (max)	Voltage Tolerance	Line & Load Regulation	Efficiency (Average)	Start Up Delay
UES36-XXXXYYSPA	9.0-10.0	0.01-4.00	36.00W	150mVpk-pk	±5%	Line: ±1% Load: ±5%	88.3%	≤3s
	10.1-11.0	0.01-3.56	36.00W	150mVpk-pk	±5%		88.3%	≤3s
	11.1-12.0	0.01-3.24	36.00W	150mVpk-pk	±5%		88.3%	≤3s
	12.1-13.0	0.01-2.97	36.00W	150mVpk-pk	±5%		88.3%	≤3s
	13.1-14.0	0.01-2.74	36.00W	150mVpk-pk	±5%		88.3%	≤3s
	14.1-15.0	0.01-2.55	36.00W	150mVpk-pk	±5%		88.3%	≤3s
	15.1-16.0	0.01-2.38	36.00W	150mVpk-pk	±5%		88.3%	≤3s
	16.1-17.0	0.01-2.23	36.00W	150mVpk-pk	±5%		88.3%	≤3s
	17.1-18.0	0.01-2.10	36.00W	150mVpk-pk	±5%		88.3%	≤3s
	18.1-19.0	0.01-1.98	36.00W	180mVpk-pk	±5%		88.3%	≤3s
	19.1-20.0	0.01-1.88	36.00W	180mVpk-pk	±5%		88.3%	≤3s
	20.1-21.0	0.01-1.79	36.00W	180mVpk-pk	±5%		88.3%	≤3s
	21.1-22.0	0.01-1.70	36.00W	180mVpk-pk	±5%		88.3%	≤3s
	22.1-23.0	0.01-1.62	36.00W	180mVpk-pk	±5%		88.3%	≤3s
	23.1-24.0	0.01-1.55	36.00W	180mVpk-pk	±5%		88.3%	≤3s
	24.1-25.0	0.01-1.49	36.00W	180mVpk-pk	±5%		88.3%	≤3s
	25.1-26.0	0.01-1.43	36.00W	180mVpk-pk	±5%		88.3%	≤3s
	26.1-27.0	0.01-1.37	36.00W	180mVpk-pk	±5%		88.3%	≤3s
	27.1-28.0	0.01-1.32	36.00W	180mVpk-pk	±5%		88.3%	≤3s
	28.1-29.0	0.01-1.28	36.00W	180mVpk-pk	±5%		88.3%	≤3s
	29.1-30.0	0.01-1.23	36.00W	180mVpk-pk	±5%		88.3%	≤3s
	30.1-31.0	0.01-1.19	36.00W	180mVpk-pk	±5%		88.3%	≤3s
	31.1-32.0	0.01-1.15	36.00W	180mVpk-pk	±5%		88.3%	≤3s
	32.1-33.0	0.01-1.12	36.00W	180mVpk-pk	±5%		88.3%	≤3s
33.1-34.0	0.01-1.08	36.00W	180mVpk-pk	±5%	88.3%	≤3s		
34.1-35.0	0.01-1.05	36.00W	180mVpk-pk	±5%	88.3%	≤3s		
35.1-36.0	0.01-1.02	36.00W	180mVpk-pk	±5%	88.3%	≤3s		

**Mechanical Details**


Notes  
 (\*1, 2, 3) Other options are available, please contact our sales representative for details.