



### Product Features


- Meets medical & I.T.E. safety
- 2 MOPP input to output isolation
- Touch current  $\leq 10\mu\text{A}$
- Energy efficiency level VI
- $\leq 0.075\text{W}$  standby power
- 5V to 24V outputs, up to 12W
- Up to 5,000m operating altitude
- Interchangeable AC plugs
- UES12LCP2-SPC (Lithium-ion battery charger)



### Models & Ratings

Model Number	Voltage <sup>(*)</sup> (V)	Current (A)	Rated Power	Ripple & Noise (max) <sup>(**)</sup>	Voltage Tolerance	Line & Load Regulation	Efficiency (Average)	Start Up Delay
UES12LCP2-XXXYYYSPA UES12LCP2-XXXYYYSPC	4.0-5.0	0.01-2.00	10.00W	150mVpk-pk	$\pm 7\%$	Line: $\pm 1\%$ Load: $\pm 5\%$	79.01%	$\leq 3\text{s}$
	5.1-5.9	0.01-2.00	11.80W	150mVpk-pk	$\pm 7\%$		80.19%	$\leq 3\text{s}$
	6.1-7.0	0.01-1.71	12.00W	150mVpk-pk	$\pm 7\%$		83.30%	$\leq 3\text{s}$
	7.1-8.0	0.01-1.50	12.00W	150mVpk-pk	$\pm 7\%$		83.30%	$\leq 3\text{s}$
	8.1-9.0	0.01-1.33	12.00W	150mVpk-pk	$\pm 5\%$		83.30%	$\leq 3\text{s}$
	9.1-10.0	0.01-1.20	12.00W	150mVpk-pk	$\pm 5\%$		83.30%	$\leq 3\text{s}$
	10.1-11.0	0.01-1.09	12.00W	150mVpk-pk	$\pm 5\%$		83.30%	$\leq 3\text{s}$
	11.1-12.0	0.01-1.00	12.00W	150mVpk-pk	$\pm 5\%$		83.30%	$\leq 3\text{s}$
	12.1-13.0	0.01-0.94	12.00W	200mVpk-pk	$\pm 5\%$		83.30%	$\leq 3\text{s}$
	13.1-14.0	0.01-0.86	12.00W	200mVpk-pk	$\pm 5\%$		83.30%	$\leq 3\text{s}$
	14.1-15.0	0.01-0.80	12.00W	200mVpk-pk	$\pm 5\%$		83.30%	$\leq 3\text{s}$
	15.1-16.0	0.01-0.75	12.00W	200mVpk-pk	$\pm 5\%$		83.30%	$\leq 3\text{s}$
	16.1-17.0	0.01-0.71	12.00W	200mVpk-pk	$\pm 5\%$		83.30%	$\leq 3\text{s}$
	17.1-18.0	0.01-0.67	12.00W	200mVpk-pk	$\pm 5\%$		83.30%	$\leq 3\text{s}$
	18.1-19.0	0.01-0.63	12.00W	200mVpk-pk	$\pm 5\%$		83.30%	$\leq 3\text{s}$
	19.1-20.0	0.01-0.60	12.00W	200mVpk-pk	$\pm 5\%$		83.30%	$\leq 3\text{s}$
	20.1-21.0	0.01-0.57	12.00W	200mVpk-pk	$\pm 5\%$		83.30%	$\leq 3\text{s}$
	21.1-22.0	0.01-0.55	12.00W	200mVpk-pk	$\pm 5\%$		83.30%	$\leq 3\text{s}$
	22.1-23.0	0.01-0.52	12.00W	200mVpk-pk	$\pm 5\%$		83.30%	$\leq 3\text{s}$
	23.1-24.0	0.01-0.50	12.00W	200mVpk-pk	$\pm 5\%$		83.30%	$\leq 3\text{s}$

### Mechanical Details

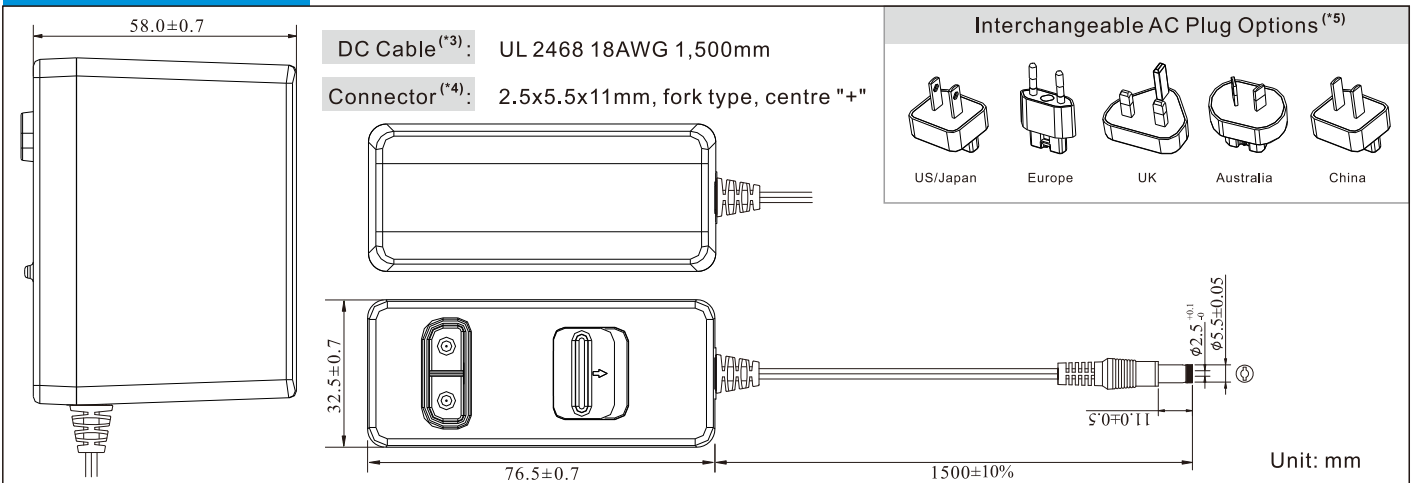

#### Notes

(\*1, 3, 4, 5) Other options are available, please contact our sales representative for details.

(\*2) Measured at output connector with 20MHz bandwidth and 0.1uF ceramic in parallel with 10uF electrolytic capacitors.

**Input**

Input Voltage Range	80-264VAC
Frequency Range	47-63Hz
Input Current	0.5A at 90VAC
Inrush Current	50A max at 240VAC cold start
Touch Leakage Current <sup>(max)</sup>	≤10μA at 264VAC

**Environmental**

Operating Temperature	0°C to 45°C
Storage Temperature	-20°C to 60°C
Operating Humidity	10% to 90% RH, non-condensing
Storage Humidity	5% to 90% RH
Operating Altitude	5,000m

**General**

Dimensions	76.5(L)x32.5(W)x58.0(H)mm
Weight	130g
MTBF	>100,000hrs MIL-HDBK-217 at 25°C

**Protection**

Overload	120-200% rated output power, auto recovery
Over Voltage	120-150% rated output voltage input to reset
Short Circuit	Trip and restart (hiccup mode)

**Safety Approvals**

Safety Agency / Mark	Medical	ITE
CB	IEC60601-1/IEC60601-1-11	IEC62368-1
UL	ANSI/AAMI ES60601-1/60601-1-11	UL62368-1
TüV Rheinland/Mark	CAN/CSA C22.2 NO. 60601-1	-
TüV Rheinland/GS	EN60601-1/EN60601-1-11	-
RCM	-	EN62368-1
CE	-	AS/NZS 62368
CCC	-	EN62368
PSE	-	GB4943.1
KC	-	J62368
FCC	-	K60950-1
		FCC PART 15

**EMC**

Emissions	Medical	ITE
Conducted	IEC/EN 60601-1-2, CISPR 11	EN55032, CISPR 32
Radiated	IEC/EN 60601-1-2, CISPR 11	EN55032, CISPR 32
Harmonic Currents	EN61000-3-2, Class A	EN61000-3-2, Class A
Voltage Flicker	EN61000-3-3	EN61000-3-3
Immunity	Medical	ITE
	IEC/EN 60601-1-2	EN55024, CISPR 24
ESD	EN61000-4-2	±15kV air, ±8kV contact
Radiated Immunity	EN61000-4-3	10V/m, 3V/m 80MHz - 2.7GHz
EFT/Burst	EN61000-4-4	±2kV on AC port, ±1kV on signal ports
Surge	EN61000-4-5	±1kV line to line (different mode)
Conducted Immunity	EN61000-4-6	3Vrms, 6Vrms (0.15MHz-80MHz)
Magnetic Field	EN61000-4-8	30 A/m
Dips & Interruptions	EN61000-4-11	0%, 70%, 0% of UT

**Others**

Dielectric Withstand Voltage	5,656VDC input to output
Insulation Resistance	10M Ohms, 500VDC input to output